
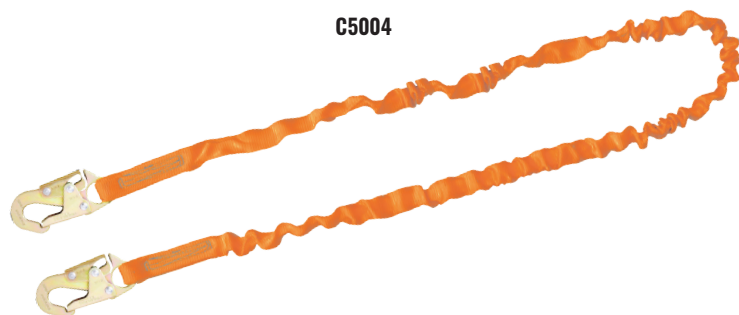


6' SINGLE LEG INTERNAL SHOCK ABSORBING LANYARDS

The 6' Single Leg Internal Shock Absorbing Lanyards meet all the stringent ANSI® Z359.13-2013 regulations and are 100% ISO 17025 third party tested (per the ANSI® testing protocols). The internal shock absorbing lanyard limits average arresting force to 900 lbs. or less. Comprised of 1" polyester webbing, these lanyards are available with either a locking snap hook, rebar hook, or peri form hook (universal rebar) anchor connection option. The shock absorption is built directly into the lanyard making the internal shock lanyard a particularly lightweight option. The 6' Internal Shock Absorbing Lanyard is designed to be the "best in class" - functional, durable, and affordable.

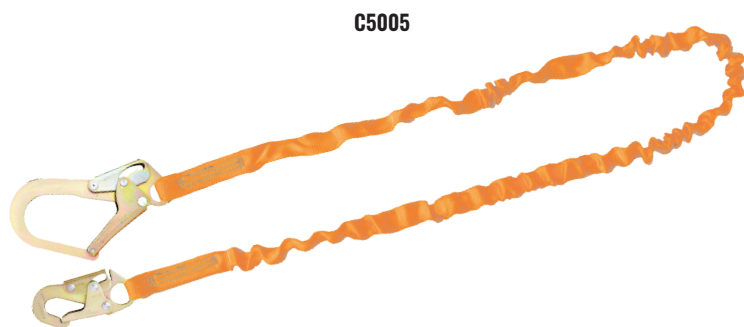

Part #	Part Name	Weight
C5004	6' Single Leg Internal Shock Absorbing Lanyard with 2 Steel Snap Hooks	2.3 lbs.
C5005	6' Single Leg Internal Shock Absorbing Lanyard with 1 Peri Form Hook and 1 Steel Snap Hook	3.2 lbs.
C5015	6' Single Leg Internal Shock Absorbing Lanyard with 1 Rebar Hook and 1 Steel Snap Hook	3.4 lbs.

Key Features

- 1" Polyester Webbing
- 3,600 lb. Connector Gate
- Meets ANSI Z359.13-2013, ANSI A10.32-12, OSHA 1926 Subpart M and OSHA 1910
- Worker Capacity Range: 130-310 lbs.
- Webbing Material: Polyester

