



# EAVE & VALLEY PROTECTOR

**Grip-Rite™ Eave & Valley Protector** provides additional protection against roof damage caused by ice and water. Install beneath shingles, along with areas where water may collect such as around chimneys, valleys, vents, skylights, or other similar areas.

Without proper drainage, water can accumulate and form ice dams, which cause more water to stay on the roof. Moisture on a roof can eventually work its way underneath the shingles to the roof deck and ultimately to the interior of the structure, causing additional damage.


- ✓ 53 mil thick self-adhesive membrane composed of elastomeric bitumen with glass mat reinforcement
- ✓ Easy-to-remove silicone treated release sheet (split-back) on the self-adhesive side

## Recommended Uses:

Roof edges and valley vulnerable to water leaks due to ice accumulation or strong winds.

## Benefits:

- ✓ Non-slip, sanded finish
- ✓ Self-sealing around nails and screws
- ✓ Effective and hard-wearing
- ✓ Clean and easy to install
- ✓ No primer required
- ✓ Consistent thickness
- ✓ Requires no special tools
- ✓ Remains stable in outdoor temperatures
- ✓ Meets ASTM standards

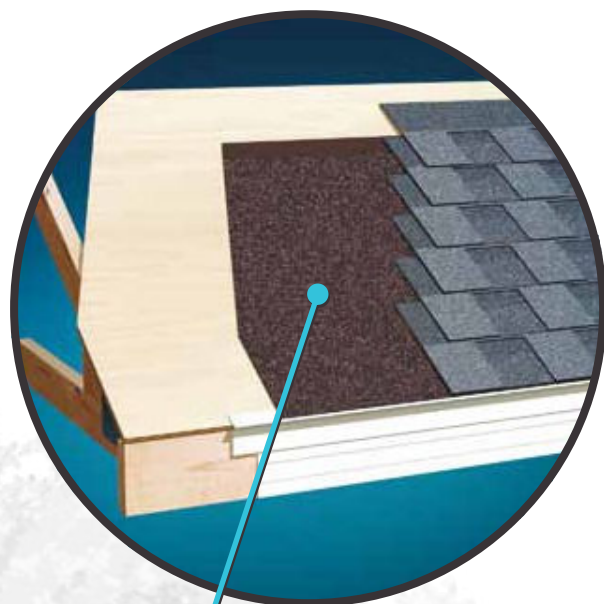

**Grip-Rite  
Eave & Valley  
Protector**

Available in  
box or labeled roll



SKU	Size		Package Type	Rolls/Pallet	Approximate Coverage	
	Area	Dimensions			Per Box or Roll	Per Pallet
GRWR1SQ	1 SQ. / 99 ft. <sup>2</sup>	36 in. x 33 ft.	Box	49	99 ft. <sup>2</sup>	3,564 ft. <sup>2</sup>
GRWR2SQ	2 SQ. / 195 ft. <sup>2</sup>	36 in. x 65 ft.	Box	25	195 ft. <sup>2</sup>	4,875 ft. <sup>2</sup>
GRWR2SQNB	2 SQ. / 195 ft. <sup>2</sup>	36 in. x 65 ft.	Labeled Roll	36	195 ft. <sup>2</sup>	7,020 ft. <sup>2</sup>



# EAVE & VALLEY PROTECTOR

## Application:

- Install roof covering as soon as possible following membrane installation.
- Cover surface with plywood or OSB panels prior to the membrane installation.
- Although it is not mandatory, the use of a primer enhances the adhesion strength of self-adhesive membranes. Please contact PrimeSource Building Products, Inc. at 800-676-7777 for a list of approved surfaces, their preparation and the use of primer.
- Minimum application temperature: 40°F

## Restrictions:

- Not recommended under metal roofing.
- If used on the whole roof surface, membrane should be applied over a proper ventilated space. Please refer to building codes for more information.
- Do not apply directly onto wood planks.

See installation guide or packaging for complete installation instructions.

Eave & Valley Protector Specifications			
Property		Standards	Eave & Valley Protector
Thickness		—	53 mil
Dimensions	1 SQ.	—	36 in. x 33 ft.
	2 SQ. & 2 SQ. NB	—	36 in. x 65 ft.
Roll Weight	1 SQ.	—	30.0 lb.
	2 SQ. & 2 SQ. NB	—	60.0 lb.
Top face		—	Sand
Underface		—	Silicone release film (split-back)
Reinforcement		ASTM D1970	Glass mat
Tensile strength, MD/XD		ASTM D1970	61 / 46 lbf/in.
Ultimate elongation, MD/XD		ASTM D1970	14%
Adhesion to plywood, 75.2°F		ASTM D1970	14.5 lbf/ft.
Thermal stability, 14 days @ 158°F		ASTM D1970	Pass
Low temperature flexibility		ASTM D1970	Pass at 20°F
Tear resistance		ASTM D1970	90 / 79 lbf
Nail sealability		ASTM D1970	Pass
Static puncture		ASTM D5602	31 lbf

lbf= pounds-force/foot Specifications subject to change without notice.