

ALSAN[®] FLASHING



WATERPROOFING

APPLICATIONS

ROOFS

FOUNDATIONS

WALLS

BITUMEN AND POLYURETHANE-BASED WATERPROOFING COATINGS

ALSAN FLASHING is a patented single-component, polyurethane- and bitumen-based waterproofing coating used to waterproof hard-to-access upstands and other details where it is difficult to apply sheet waterproofing membranes. The product is liquid-applied, resistant to punctures and UV rays, and it is used in combination with our POLYFLEECE.

BENEFITS

- Provides superior protection against moisture
- Is easy to apply, which reduces the cost of labour
- Adapts to any irregular shape
- Eliminates fire hazards because no torch is used, bringing peace of mind to customers, neighbours and tenants




Likewise, our **ALSAN FLASHING WINTER** offers the same performance as the standard version, but at a low-temperature application (down to -10 °C [14 °F] without conditioning). Two component, it is available in two parts in a box for a total volume of 3.37 L.



TECHNICAL CHARACTERISTICS

	ALSAN FLASHING	ALSAN FLASHING WINTER
Single component	Yes	No (Part A + Part B in a box)
Application temperature	5 °C and above (41 °F and above)	-10 °C to 5 °C (14 °F to 41 °F)
Sizes available	3.78 L (1 US gal) 18.93 L (5 US gal)	3.37 L (0.89 US gal)
Coverage rate	1.2 m ² /L (50 ft ² /US gallon)	1.2 m ² /L (50 ft ² /US gallon)

ALSAN FLASHING WATERPROOFING SYSTEM

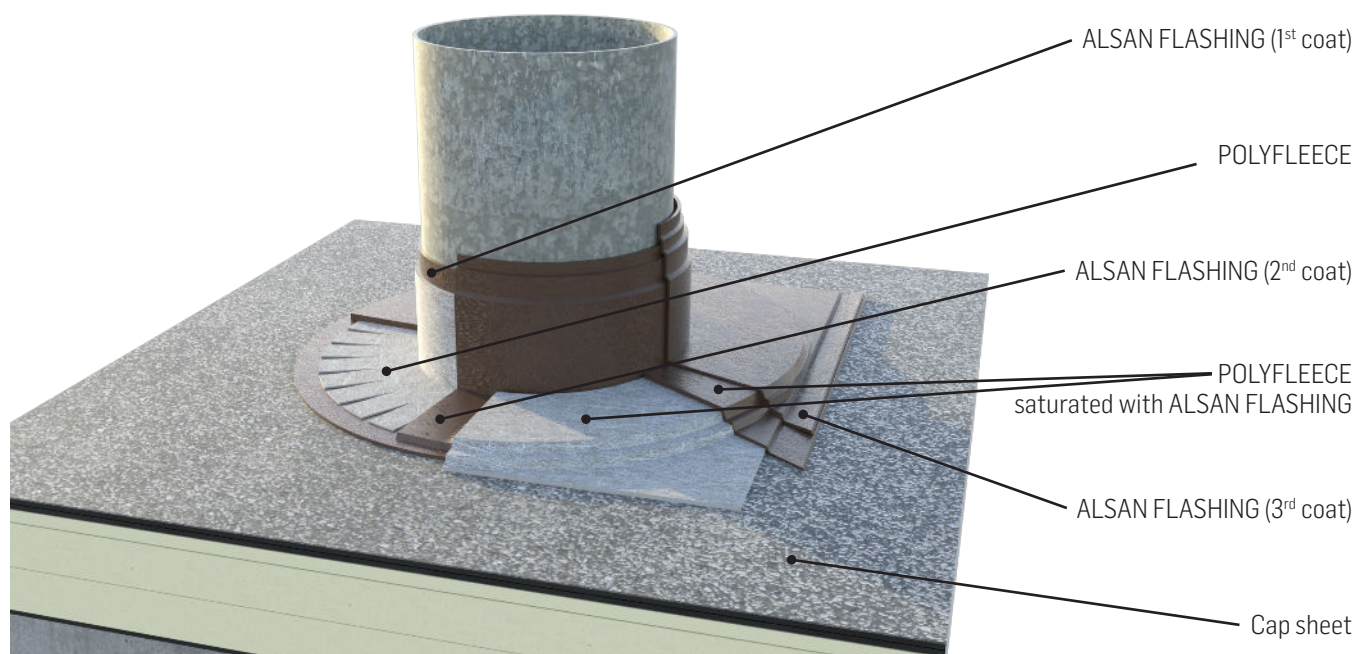

AVAILABLE FINISHES

For aesthetic reasons, the surface can be covered with mineral granules or with the **SOPRALASTIC 124 ALU** sealant for an aluminum-coloured finish.



For further information, please contact your SOPREMA representative.

