


# FasciaVent™ by DCI

## Intake ventilation

## Installation instructions for fascia

It is important to follow each step within these instructions for proper installation of the FasciaVent™ product. Any deviation from these instructions will void any warranty written or implied by DCI Products. If you need assistance with this product installation, please call DCI Products Monday through Friday 8am- 5 pm est. Our toll free number is 800-622-4455 or contact us via email [info@dciproducts.com](mailto:info@dciproducts.com)

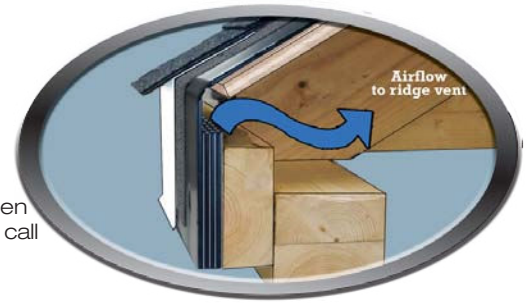

### Benefits

- 3/4" thick, strong & cost effective solution
- Easy to cut, easy to install & non-corrosive
- Provides the necessary air intake to match most exhaust vents
- Convenient 3' foot lengths for easy handling
- Can use power nail guns, will not crush

### INSTALLATION:


1. Cut a 1" slot at the fascia board where it meets the roof edge. Start 12" from any edge, side, or corner and make the slot continuous. Seal the open ends with the included End Caps or fabric. (*Detailed diagram on reverse of this page.*)

2. Install the FasciaVent with the lift resting on the fascia board as shown. Secure the FasciaVent to the fascia board using a minimum of 1 1/4" roofing nails. Staple or nail the tapered edge of FasciaVent to the roof decking. Extend FasciaVent even with side edges of fascia and bottom of the gutter.

3. Install the rolled ice shield or tar paper over FasciaVent. Begin shingling leaving a 1" overhang at the roof/soffit edge.

4. Install gutter using brackets of choice. Ensure that the nails or screws enter the full depth of the wood fascia board below the 1" cutout.

5. Air now enters under and behind the gutter and into your attic. The metal gutter is also away from the wood fascia board eliminating wood decay of the fascia board and acting as a roof/fascia drip edge.

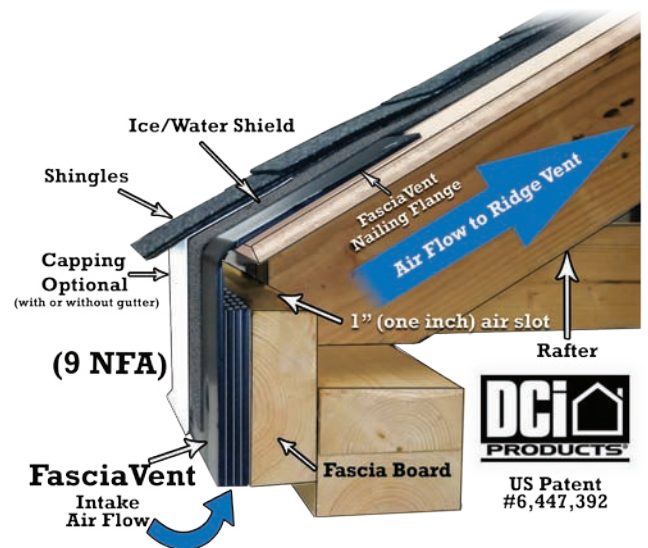

Note: a 1" air space between the roof sheathing and fascia boards & supports is required at the roof & fascia junction.


# FasciaVent™ by DCI

Intake ventilation


## Installation instructions for fascia

It is important to follow each step within these instructions for proper installation of the FasciaVent™ product. Any deviation from these instructions will void any warranty written or implied by DCI Products. If you need assistance with this product installation, please call DCI Products Monday through Friday 8am- 5 pm est.

Our toll free number is 800-622-4455 or contact us via email [info@dciproducts.com](mailto:info@dciproducts.com)

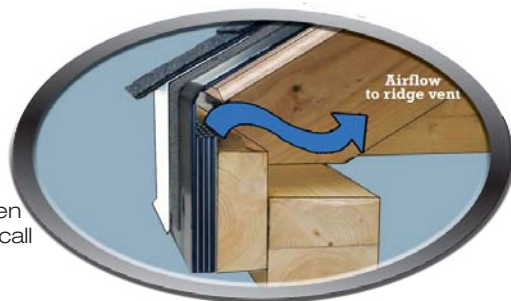

## Installing FasciaVent & End Caps

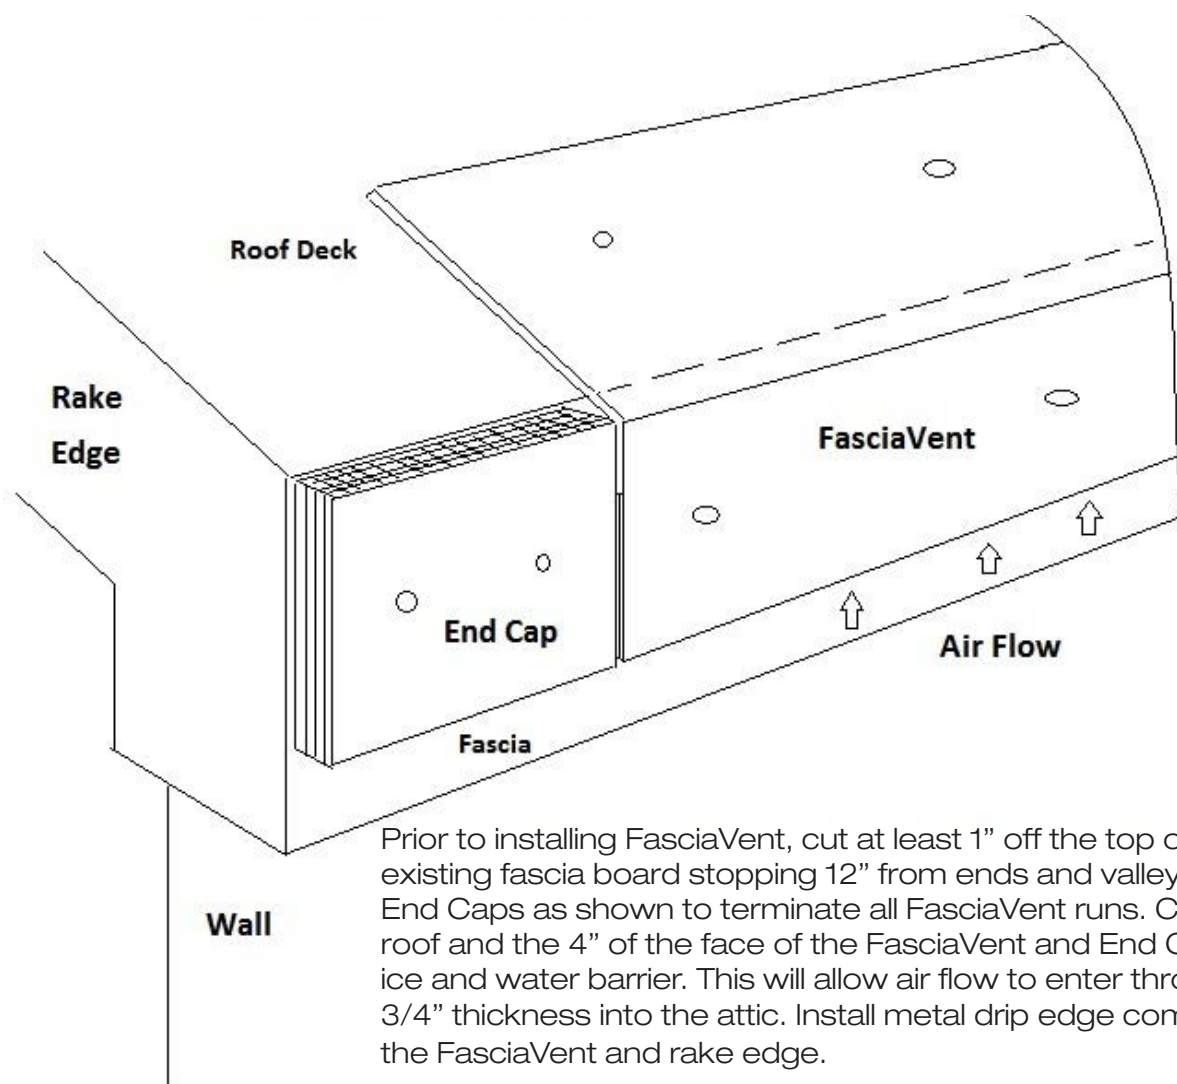

Prior to installing FasciaVent, cut at least 1" off the top of the existing fascia board stopping 12" from ends and valleys. Install the End Caps as shown to terminate all FasciaVent runs. Cover the roof and the 4" of the face of the FasciaVent and End Cap with an ice and water barrier. This will allow air flow to enter through the 3/4" thickness into the attic. Install metal drip edge completely on the FasciaVent and rake edge.

*(Detailed installation instructions on reverse of this page.)*

**4 End Caps are included in each box of FasciaVent.**

Note: a 1" air space between the roof sheathing and fascia boards & supports is required at the roof & fascia junction.